

SUPRA XL ANNORUM 4X1.6

High End Loudspeaker cable


Gauge: 4x1.6mm² / AWG 15

Rev.date: 2022-08-30

Customs tariff no: 8544499390

Country of origin: Sweden

- Rubber based jacket for minimal microphony pick-up
- Very low inductance
- Double insulated, approved for 100V systems
- Star Quad configuration for noise immunity

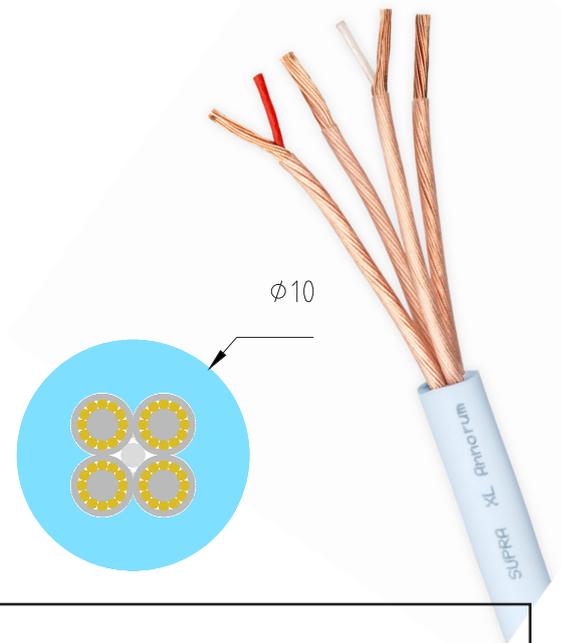

XL ANNORUM 4x1.6 - Star Quad configuration

The design is a 4 x 1.6 mm² square shaped lead configuration, where each lead comprises a plastic core around which 12 strands 5N Oxygen-free Copper are spun in a tight pitch. This minimizes skin-effect and inductance efficiently and by choosing the sonically benign PP as di-electric (insulation) the sonical stability by preventing corrosion and material fatigue, will remain at highest possible level year after year.

The specification and performance fits right in between our Supra Quadrax and Sword edition.

- Star Quad configuration for inductance cancellation and noise immunity
- 5N Oxygen free Copper strands spun on core to minimize skin-effect
- PP dielectric for maximum signal integrity and chemical stability
- Developed in co-operation with renowned Swedish speaker designer as internal wiring

CONSTRUCTION

Conductor (x4): OFC-wire 12x0.40 mm, spun around a PP-core

Cross section Area: 4x1.6mm² / AWG 15

Insulation: PP transprant. Cores + red / - white

Insulation thickness: 0.7 mm

Jacket: Rubber based PVC GA54, round

Jacket thickness: 2.0 mm

Diameter: 10 mm

Colour: Iceblue (other colours upon order)

Marking: SUPRA XL ANNORUM 4x1.6 > Made in Sweden > Meter mark

Weight: 123 kg/km

Packing: Bobbin 75m (other lengths upon order)

ELECTRICAL SPECIFICATION

Resistance: 10.5 ohm/km

Inductance: 0.30 uH/m

Rated voltage: 100V



PRODUCT	Qty	Part.no	EAN-13
XL ANNORUM 4X1.6 BLUE B75	75M	1000001147	7330060206351