

## LORAD 2.5 SPC CS-16-EU ANGLED

Silver plated & Screened Mains Cord Set, 250V/16A


Gauge: 3x2.5mm<sup>2</sup> / AWG 13

Rev.date: 2022-08-30

Customs tariff no: 8544499500

Country of origin: Sweden

16A

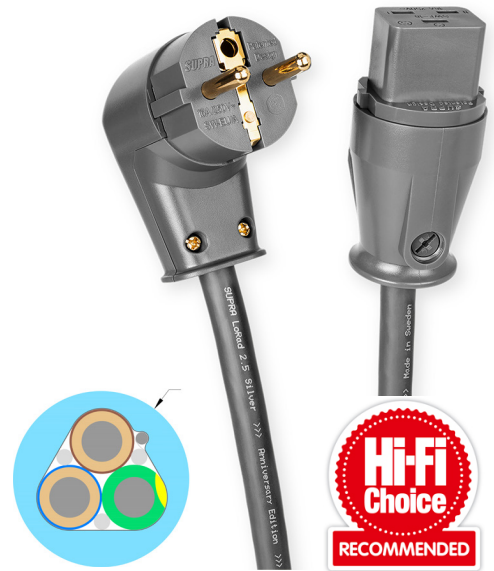

- Screened mains flex cable
- Gold plated Connectors, angled Schuko plug
- Silver plated OFC wires - low loss construction
- Protects both from electric & magnetic fields.

### LoRad - Low Radiation - Silver Plated

Shielded cord set comprising Supra LoRad Silver plated 3x2.5 mm<sup>2</sup> cable, Supra SWF16 female plug (IEC-320) & Supra SW-EU/A male plug. Current rating 16 A continuously. EU-version, with angled Schuko plug, is the most common standard throughout Europe. Exceptions are Denmark, Italy, Switzerland, Ireland & Britain. Fits our LoRad mains power distribution blocks rated 16A. LoRad means Low Radiation and the design of these mains flex cables minimises both electric & magnetic alternating fields. Allow your hi-fi gear the most welcome benefit of all, the possibility to be silent, when supposed to. Only then, the tiniest details and notes will become clearly audible. LoRad protects both from alternating fields radiating from the cable as well as from pick-up of surrounding airborne noise fields.

- Short pitch twisting of the lead cores cancels the magnetic alternating fields and will not infect adjacent interconnects with noise feedback.
- LoRad will result in a cleaner sound, better picture and a more healthy home and working environment with low levels of harmful fields.
- The screen protects your equipment from radiated mains, RF pick-up.

### CONSTRUCTION

- Cable: [LoRad 3x2.5 SPC](#)
- Cross section area: Silver plated OFC 3x2.5mm<sup>2</sup> / AWG 13
- Screen: Semi-conductive Nylon tape, black, 100%
- Jacket: PVC GA78, round
- Diameter: 11mm
- Cable colour: Anthracite Grey (other colours upon order)
- Marking: SUPRA LORAD SPC 3G2.5 + Made in Sweden + Meter mark
- Connectors: SW-EU/A Schuko male to SWF-16 16A C19 IEC320 female plug
- Pin Material: 24K Gold plated Copper
- Pin connection: Screw/clamp
- Colour: Anthracite Grey
- Cable direction: Follow the arrows > Wall socket > Power inlet
- Rated Voltage/current: 250V / 16A
- Packing: 1-2m Blister 25x21.5x4.8cm, 4m Blister 31,5x25,4x6,0cm



SWF-16 16A C19

Note! The connector must be connected to a wall socket with a ground terminal for the full LoRad effect to take place. Lorad are tested and certified by Intertek Sweden, meeting the European safety regulation HD21.5 S3.



Standard lengths as below, special length cables upon order.

PRODUCT	Qty	Part.no	EAN-13	Carton Weight
LORAD 2.5 SPC CS-16-EU/ANGLED 1M	1PCS	3004100826	7330060206832	25 0,37
LORAD 2.5 SPC CS-16-EU/ANGLED 1.5M	1PCS	3004100834	7330060206849	25 0,48
LORAD 2.5 SPC CS-16-EU/ANGLED 2M	1PCS	3004100842	7330060206856	25 0,58
LORAD 2.5 SPC CS-16-EU/ANGLED 4M	1PCS	3004100859	7330060206863	13 1,04